

The Fluido 2 microplate washer is ideal for both absorbance and luminescence based microplate assays. Ideal for busy laboratories running multiple microplate applications.

# Biochrom<sup>®</sup> Anthos Fluido 2 Microplate Washer



## Key Features

### Effective

- <1 µL remaining in wells after wash (residual volume)
- Cross-wise aspiration is an option for complete well aspiration
- Manifold is used to probe the dimensions of the well for best results

### Flexible

- Up to 4 different channels and bottles allowing flexible configurations e.g. 3 wash and 1 rinse or 4 different wash solutions
- 8-channel manifolds supplied for 96-well plates. Optional 16-channel manifold for 384-well plates.
- Easy plate setup and flexible software
- Automatic rinse to prevent clogging
- Wash without touching the well using automatic well depth detection and crosswise aspiration selectable functions
- Configurable to a range of microplate well types
- Three different rinse/prime methods

### Quiet Operation

- Vacuum and pressure-free system with quiet pumps for a more peaceful lab.

### Easy to Use

- Color coded tube fittings
- Manifold is used to probe the parameters of the wells of the microplate

## Program Options

- Up to 8 cycles can be included per procedure
- 20 different wash cycles can be defined including:
  - Bottom and overflow washing options
  - Adjustable dispense volume and speed
  - Adjustable aspiration speed and time
  - Adjustable soak time
  - Shaking (3 modes)
- Fifty different procedures may be created by putting up to 8 previously defined wash cycles in sequence
- Washing procedures can either be over the whole plate or a few strips.
- Overflow and bottom washing options

## Safety Features

- Manifold cover reduces aerosols
- Emergency stop (prevents damage to the microplate)
- Optional liquid level warnings and liquid level sensors

## TECHNICAL DETAILS


### Biochrom Anthos Fluido 2 Microplate Washer

<b>Dispensed volumes</b>	50 - 2000µL in 50µL increments (for 8 and 12-channel manifolds) 50 - 500µL in 25µL increments (for 16-channel manifold)
<b>Dispensing precision</b>	< 5% at 300µL across the plate (for 8 and 12-channel manifolds) < 5% at 100µL across the plate (for 16-channel manifold)
<b>Residual volume</b>	<1µL per well
<b>User interface</b>	2 x 16 characters backlit display Keyboard with 5 function keys
<b>Shaking</b>	3 speed
<b>Microplates</b>	96-well plates flat and round bottomed with standard ANSI SBS footprint 384-well plates with standard ANSI SBS footprint with 16-channel manifold (optional)
<b>Power requirement</b>	90 -130V, 180 -250 VAC (autosensing), 47/66Hz
<b>Languages</b>	English, German
<b>Instrument dimensions (wxhxd)</b>	28 cm x 22 cm x 42 cm (11" x 8.7" x 16.5")
<b>Weight:</b>	6.2 Kg (13.7lbs)

### ORDERING INFORMATION:

80-4000-10	<b>Biochrom Anthos Fluido 2 96 W2 Microplate Washer</b> for 96-well Plates 2 liquid lines, 8-channel manifold and tubing, 1 wash bottles (2L), 1 rinse bottle (2L), 1 waste bottle (2.5L)
80-4000-11	<b>Biochrom Anthos Fluido 2 96 W4 Microplate Washer</b> for 96-well Plates 4 liquid lines, 8-channel manifold and tubing, 3 wash bottles (2L), 1 rinse bottle (2L), 1 waste bottle (2.5L)
80-4000-12	<b>Biochrom Anthos Fluido 2 384 W2 Microplate Washer</b> for 96- and 384-well Plates 2 liquid lines, 8-channel and 16-channel manifolds and tubing, 1 wash bottles (2L), 1 rinse bottle (2L), 1 waste bottle (2.5L)
80-4000-13	<b>Biochrom Anthos Fluido 2 384 W4 Microplate Washer</b> for 96- and 384-well Plates 4 liquid lines, 8-channel and 16-channel manifolds and tubing, 3 wash bottles (2L), 1 rinse bottle (2L), 1 waste bottle (2.5L)
<b>Accessories</b>	
SB021013000	<b>16-Channel Manifold</b> for 384-well plates
SB021011002	<b>12-Channel Manifold</b> for 96-well plates
SS028046	<b>Atlantis Washer Maintenance kit</b> , consisting of: 2 x T 2.5 A spare fuses, 2 cleaning needles, tubing sets for all bottles, cleaning tool for needles, tubing set for manifold, spare tubing set for manifold.
SB021080	<b>Liquid Level Sensor</b>

*Distributors Worldwide*

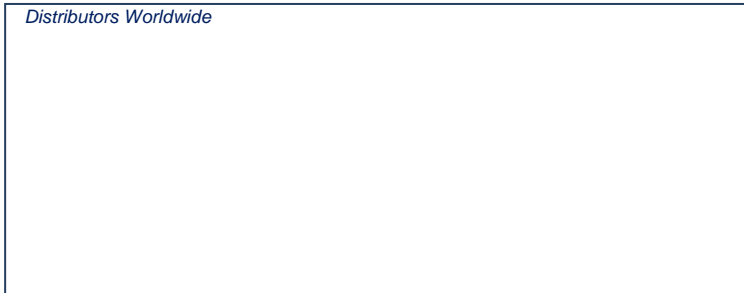

Biochrom Ltd  
Tel: +44 1223 423723  
Fax: +44 1223 420164  
Email: [enquiries@biochrom.co.uk](mailto:enquiries@biochrom.co.uk)  
[www.biochrom.co.uk](http://www.biochrom.co.uk)

Biochrom US  
Tel: 877- BIO-CHROM (877-246-2476) (Toll free)  
Tel: 508-893-8999  
Fax: 508-429-5732  
Email: [sales@biochrom-us.com](mailto:sales@biochrom-us.com)  
[www.biochrom-US.com](http://www.biochrom-US.com)

